



MICRO POWER

EMERGENCY POWER PACK

MP240

Normal & Emergency Lighting
with same Lamp

LED

EMERGENCY POWER PACK



SPECIFICATIONS

INPUT VOLTAGE	: 220 V AC/50Hz +/-10%
OUTPUT VOLTAGE	: 180-240 V
BATTERY	: Lithium Ion 11.1V / 4400mAh
BACK UP TIME	: 2 hrs (18W)
EMERGENCY POWER	: 100% Full Lumen
MODE	: Maintained / Non Maintained
POWER CONSUMPTION	: <25VA >5VA
CHARGE	: BMS (battery management system) Constant Current & Constant Voltage


PROTECTION	: No Lamp Load cut off Emergency output /output Fuse
GROSS WEIGHT	: 0.421 KG. (Emergency Pack 0.124 KG. / Battery Pack 0.298 KG.)

A FULL RANGE OF SOLUTION FOR

Interior Decoration, commercial, architectural,
And industrial environments

THIS INCLUDES

- School Lighting Fixtures
- Office - LED T8
- Hospital - LED Down Light
- Shopping center - LED Panel
- Hotel - LED E27
- Supermarket - LED Water Proof
- Factory - LED Explosion Proof
- Residential
- Refinery
- Power Plant
- Hazardous Area

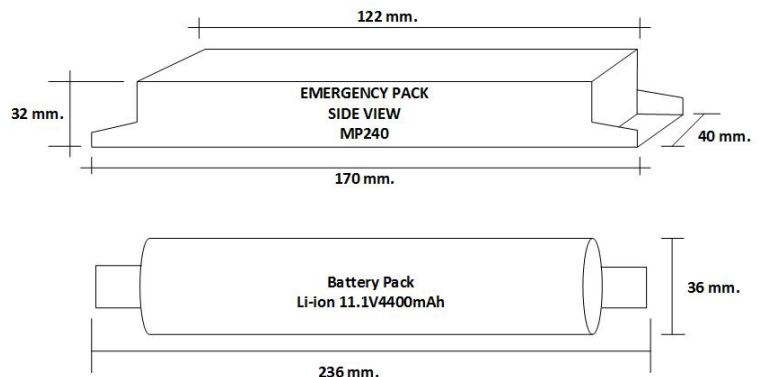

บริษัท ไมโคร เพาเวอร์ (ไทย) จำกัด MICRO POWER (THAI) CO., LTD.

9/6 ถนนเจ้าคุณทหาร แขวงคลองสามประเวศ เขตลาดกระบัง กรุงเทพฯ 10520

Tel. : 02-150-9501-10 Fax : 02-150-9511

Email : micropower_1@yahoo.co.th Website : www.micropower-thai.com

TIS 1955-2551





**Wiring Diagram Emergency Light Power Pack
Model.MP240**

